


## TYPICAL and BOUNDED BER PERFORMANCE for 16/64/256-QAM

### TYPICAL & BOUNDED BER PERFORMANCE FOR M-QAM

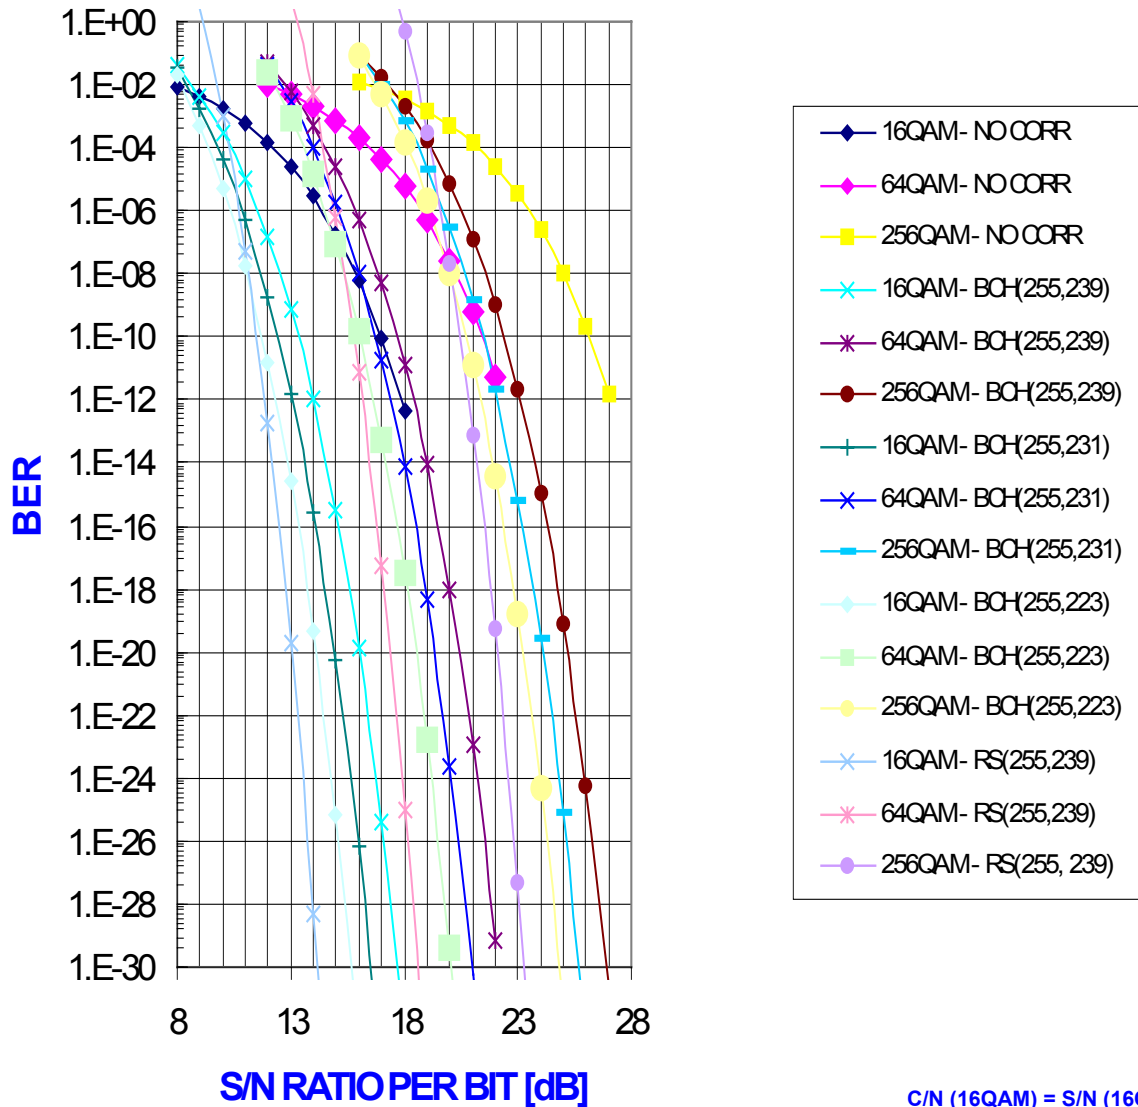

C/N (16QAM) = S/N (16QAM) + 6dB  
 C/N (64QAM) = S/N (64QAM) + 7.8dB  
 C/N (256QAM) = S/N (256QAM) + 9dB

## TYPICAL and BOUNDED BER PERFORMANCE for 32/128-QAM

